




LOOSE SIDING FASTENER INSTALLATION INSTRUCTIONS



Insert fastener flange through the back of the nail slot

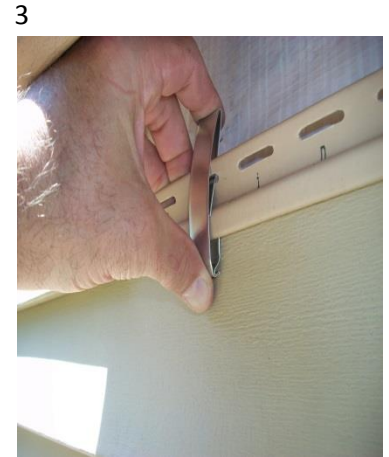

Slide the fastener down

Remove nails behind loose siding



Then push up



Then fold the top of the fastener back behind the siding

Install nails

Install fasteners every 8"

